

# EY Series 1200W Regulated High Voltage DC Power Supplies

1 kV to 60 kV  
Rack Mount  
3.5 Inch Panel  
Height

Laboratory  
Performance

CE and Semi S2-  
93 Compliant

Fully RoHS  
Compliant

The EY Series of 1200 watt high voltage supplies feature flexible embedded controls with low ripple and noise. They are air insulated, fast response units, with tight regulation and extremely low arc discharge currents.

Please refer to Technology > Applications page on our web site for typical applications.

The EY Series are fully compliant with the Following European Directives:  
EN61000-3-2, Line Harmonics  
EN61010/ IEC61010, Safety  
EN61000-6-4, Conducted and Radiated Emissions  
EN61000-6-2:2005, Conducted and Radiated Immunity  
2011/65/EU, Restriction of the use of hazardous substances (RoHS).



Models from 0 to 1 kV through 0 to 60 kV, 3.5" H x 20.5" D, 18.5 lbs.

## Features:

**Arc Quench.** The HV output is inhibited for a short period after each load arc to help extinguish the arc.

**Arc Count.** Internal circuitry constantly senses and integrates arcs that occur over a given time. In the event a system or load arcing problem develops and exceeds factory-set parameters, the power supply will cycle off in an attempt to clear the fault and then automatically restart after a pre-set "off dwell time".

**Pulse-Width Modulation.** Off-the-line pulse-width modulation provides high efficiency and a reduced parts count for improved reliability.

**Embedded Microcontroller control.** Front panel digital encoders provide high resolution local adjustment of voltage and current program. Integral RS-232, USB and optional ethernet communications provide remote control program and monitor.

**Low Ripple.** Typically, ripple is less than 0.02% RMS of rated voltage at full load.

**Air Insulated.** The EY Series features "air" as the primary dielectric medium. No oil or encapsulation is used to impede serviceability or increase weight.

**Constant Voltage/Constant Current Operation.** Automatic crossover from constant-voltage to constant-current regulation provides protection against overloads, arcs, and short circuits.

**Redundant Thermal Overload Protection.** Thermostats and fan RPM sensing shut down the power supply due to over temperature or reduced fan speeds.

**Tight Regulation.** Voltage regulation is better than 0.005% for allowable line and load variations. Current regulation is better than 0.1% from short circuit to rated voltage.

**Constant Current/Current Trip.** A rear panel switch allows selection of either current mode.

**Slow Start.** Adjustable ramp time from 0 - 30 seconds. Output ramps from 0 V to programmed voltage level.

**Warranty.** All power supplies are warranted for three years. A formal warranty statement is available.

## Specifications

(Specifications apply from 5% to 100% rated voltage. Operation is guaranteed down to zero voltage with a slight degradation of performance.)

**Input:** 180 to 264 VRMS single-phase, 48-63 Hz, 1500 VA maximum at full load. C14 connector per IEC 60320 with mating line cord.

**Efficiency:** Typically greater than 85% at full load.

**Power Factor:** > 0.995.

**Output:** Continuous, stable adjustment, from 0 to rated voltage or current by panel mounted optical rotary encoder or by external +10V signals. Voltage accuracy is 0.5% of setting + 0.2% of rated. Optical rotary encoder resolution: 0.025% with "Fine Adjustment" mode selected. 0.25% with "Coarse Adjustment" mode (default). Repeatability is < 0.1% of rated.

**Static Voltage Regulation:** Better than  $\pm 0.005\%$  for specified line variations and  $0.005\% + 0.5 \text{ mV/mA}$  for no load to full load variations.

**Dynamic Voltage Regulation:** For load transients from 10% to 99% and 99% to 10%, typical deviation is less than 2% of rated output voltage with recovery to within 1% in 500 ms and recovery to within 0.1% in 1 ms.

**Ripple:** Better than 0.02% of rated voltage + 0.5 V RMS at full load.

**Current Regulation:** When in current regulation mode, better than 0.1% from short circuit to rated voltage at any load condition.

**Voltage Monitor:** 0 to +10 V equivalent to 0 to rated voltage. Accuracy: 0.5% of reading + 0.2% of rated. Impedance is 10 K $\Omega$ .

**Current Monitor:** 0 to +10 V equivalent to 0 to rated current. Accuracy: 1% of reading + 0.1% of rated. Impedance is 10 K $\Omega$ .

**Stability:** 0.01% per hour after 1/2 hour warm-up, 0.05% per 8 hours.

**Voltage Rise/Decay Time Constant:** The voltage rise time constant is 50 ms typical for all models using either HV enable or remote programming control. The voltage decay time constant is 50 ms with a 10% resistive load.

**Temperature Coefficient:** 0.01% / $^{\circ}\text{C}$ .

**Ambient Temperature:** -20 to +40 $^{\circ}\text{C}$ , operating; -40 to +85 $^{\circ}\text{C}$ , storage.

**Polarity:** Available with either positive, negative or reversible polarity with respect to chassis ground.

**Protection:** Automatic current regulation protects against all overloads, including arcs and short circuits. Thermal switches and RPM sensing fans protect against thermal overload. Fuses, surge-limiting resistors, and low energy components provide ultimate protection.

**Arc Quench:** An arc quench feature provides sensing of each load arc and quickly inhibits the HV output for approximately 20 ms after each arc. Standard on 8 - 60 kV models; optional on 1- 6 kV models.

**Arc Count:** Internal circuitry senses the number of arcs caused by external load discharges. If the rate of consecutive arcs exceeds approximately one arc per second for five arcs, the supply will turn off for approximately 5 seconds to allow clearance of the fault. After this period the supply will automatically return to the programmed kV value with the rise time constant indicated. If the load fault still exists, the above cycle will repeat. Standard on 8 - 60 kV models; optional on 1- 6 kV models.

**External Interlock:** Open = off, closed = on. Normally latching except for blank front panel version where it is non-latching.

**Remote HV Enable/Disable:** 0 - 1.5 V = OFF, 2.5 - 15 V = ON.

**RS232/USB/Ethernet Programming and Monitor Accuracy:**

**Resolution:** 0.025% of full scale for both the voltage and the current programs. 0.1% of full scale for both the voltage and the current monitors

**Remote setting accuracy:** Voltage setting accuracy is better than 0.5% of setting + 0.2% of rated.

**Remote reading accuracy:** Voltage reading accuracy is 0.5% of reading + 0.2% of rated. Current reading accuracy is 1% of reading + 0.1% of rated.

**Front Panel Elements.**

**Output Voltage & Current Display:** 3.5 Digit digital meters. 1250 count maximum.

**Indicators:** AC Power, Current Mode, Voltage Mode, Pol +, Pol -, Fault, Fine Adjustment, Preset, Control Lock, Remote Enable, Remote Program, HV On.

**AC Power:** Rocker switch

**Switches (momentary):** HV On, SS Slope, Standby, Remote Enable, Remote Program, Preset, Fine Adjust, Control Lock.

**Rotary Encoders:** Voltage Adjust, Current Adjust.

**Rear Panel Elements.** AC power entry connector, fuses, power on indicator, ground stud, HV output connector, remote interface connector, RS232/USB connectors.

The signals provided on the remote interface connector are as follows:

**Inputs:** Safety interlock, output voltage and current program signals, high voltage enable and remote HV on.

**Outputs:** Output voltage and current monitor signals, HV status, fault status, IV mode status and a +10 V reference source.

Signal common and ground reference terminals are also provided.

**Accessories:** Detachable, 8 foot, shielded high voltage coaxial cable (see models chart for cable type), 6 foot NEMA 6-15 line cord, 10 foot null modem cable and 10 foot USB cable are provided.


**Weight:** Approximately 18.5 lbs.

# Options

Symbol	Description	AC	Arc Count Only
NC	Blank front panel, power switch and indicator only.	AQ	Arc Quench Only
ZR	Zero start interlock. Voltage control, local or remote, must be at zero before the HV will enable.	ETH	Virtual RS-232 COM port over Ethernet network. (Requires compatible OS (eg Windows) for COM drivers)
5VC	0-5 V voltage and current program/monitor.		
ARC	Arc count and quench as described in the specifications for 1 - 6 kV models.		

# Models

Positive Polarity	Negative Polarity	Reversible Polarity	Output Voltage	Output Current	Max Stored Energy J	Output Cable	
Reversible Polarity Only			EY1R1200	0 - 1kV	0 - 1200mA	1.0	RG - 58U
			EY1.5R800	0 - 1.5kV	0 - 800mA	1.1	RG - 58U
			EY2R600	0 - 2kV	0 - 600mA	1.0	RG - 58U
			EY3R400	0 - 3kV	0 - 400mA	1.1	RG - 58U
			EY5R240	0 - 5kV	0 - 240mA	1.2	RG - 58U
EY6R200	0 - 6kV	0 - 200mA	1.4	RG - 58U			
EY8P150	EY8N150	EY8R150	0 - 8kV	0 - 150mA	1.3	RG - 8U	
EY10P120	EY10N120	EY10R120	0 - 10kV	0 - 120mA	1.6	RG - 8U	
EY12P100	EY12N100	EY12R100	0 - 12kV	0 - 100mA	2.0	RG - 8U	
EY15P80	EY15N80	EY15R80	0 - 15kV	0 - 80mA	1.6	RG - 8U	
EY20P60	EY20N60	EY20R60	0 - 20kV	0 - 60mA	2.0	RG - 8U	
EY25P48	EY25N48	EY25R48	0 - 25kV	0 - 48mA	1.4	RG - 8U	
EY30P40	EY30N40	EY30R40	0 - 30kV	0 - 40mA	2.1	RG - 8U	
EY40P30	EY40N30	EY40R30	0 - 40kV	0 - 30mA	2.8	RG - 8U	
EY50P24	EY50N24	EY50R24	0 - 50kV	0 - 24mA	3.4	RG - 8U	
EY60P20	EY60N20	EY60R20	0 - 60kV	0 - 20mA	4.1	RG - 8U	

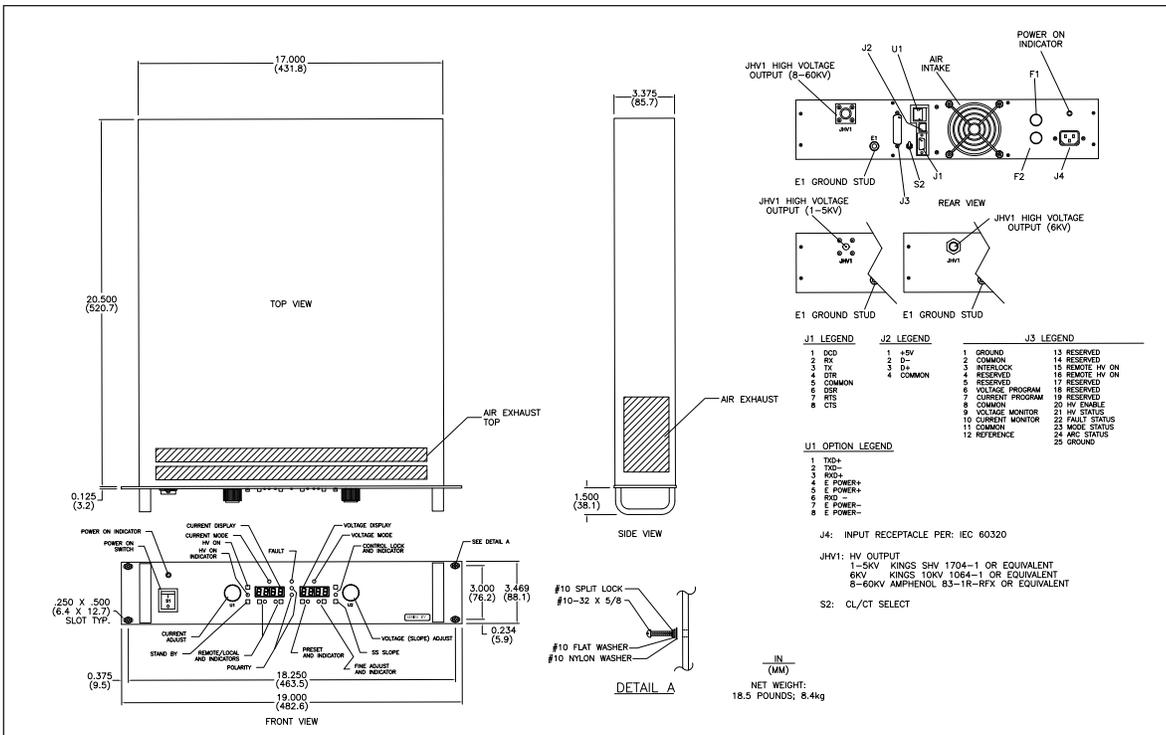

**WARNING** Before the installation or operation of this high voltage power supply, you must read and understand all the safety and operating procedures documented in the instruction manual that is included with this product. High voltage can be fatal if not used properly. Exercise extreme caution when operating this product. Take all necessary precautions to protect yourself and property from harm. This is a high voltage DC power supply and if you are unsure that the product selected is suitable for your specific application please contact our Sales and Application team.