

KT Series 2000W Regulated High Voltage DC Power Supplies

70 kV to 150 kV
Rack Mount
7 Inch Panel
Height...

Laboratory
Performance...

CE and Semi
S2-93 Compliant

Fully RoHS
Compliant

The KT Series of 2000 watt high voltage supplies feature flexible embedded controls with low ripple and noise. They are air insulated, fast response units, with tight regulation and low arc discharge currents.

Please refer to Technology > Applications page on our web site for typical applications

The KT Series are fully compliant with the Following European Directives:
EN61010/ IEC61010, Safety
EN61000-6-4, Conducted and Radiated Emissions
EN61000-6-2:2005, Conducted and Radiated Immunity
2011/65/EU, Restriction of the use of Hazardous Substances (RoHS)



Models from 0 to 70 kV through 0 to 150 kV, 7.0" H x 24.0" D, 42 lbs.

Features:

Arc Quench. The HV output is inhibited for a short period after each load arc to help extinguish the arc.

Arc Count. Internal circuitry constantly senses and integrates arcs that occur over a given time. In the event a system or load arcing problem develops and exceeds factory-set parameters, the power supply will cycle off in an attempt to clear the fault and then automatically restart after a pre-set "off dwell time".

Pulse-Width Modulation. Off-the-line pulse-width modulation provides high efficiency and a reduced parts count for improved reliability.

Embedded Microcontroller control. Front panel digital encoders provide high resolution local adjustment of voltage and current program. Integral RS-232, USB and optional ethernet communications provide remote control program and monitor.

Low Ripple. Typically, ripple is less than 0.025% RMS of rated voltage at full load.

Air Insulated. The KT Series features "air" as the primary dielectric medium. No oil or encapsulation is used to impede serviceability or increase weight.

Constant Voltage/Constant Current Operation. Automatic crossover from constant-voltage to constant-current regulation provides protection against overloads, arcs, and short circuits.

Redundant Thermal Overload Protection. Thermostats and fan RPM sensing shut down the power supply due to over temperature or reduced fan speeds.

Tight Regulation. Voltage regulation is better than 0.005% for allowable line and load variations. Current regulation is better than 0.1% from short circuit to rated voltage.

Constant Current/Current Trip. A rear panel switch allows selection of either current mode.

Slow Start. Adjustable ramp time from 0 - 30 seconds. Output ramps from 0 V to programmed voltage level.

Warranty. Standard power supplies are warranted for three years; OEM and modified power supplies are warranted for one year. A formal warranty statement is available.



Designing Solutions for High Voltage Power Supply Applications

GLASSMAN HIGH VOLTAGE INC.

124 West Main Street, PO Box 317, High Bridge, NJ 08829-0317
(908) 638-3800 • Fax (908) 638-3700 • www.glassmanhv.com

GLASSMAN EUROPE Limited (UK)
+44 1256 883007 FAX +44 1256 883017
E-mail: Glassman_europe@glassmanhv.com

GLASSMAN JAPAN High Voltage Limited
+81 45 902 9988 FAX +81 45 902 2268
E-mail: Glassman_japan@glassmanhv.com

Specifications

(Specifications apply from 5% to 100% rated voltage. Operation is guaranteed down to zero voltage with a slight degradation of performance.)

Input: 198 to 264 VRMS single-phase, 48-63 Hz, 4000 VA maximum at full load. C20 connector per IEC 60320 with mating line cord.

Efficiency: Typically greater than 85% at full load.

Output: Continuous, stable adjustment, from 0 to rated voltage or current by panel mounted optical rotary encoder or by external +10V signals. Voltage accuracy is 0.5% of setting + 0.2% of rated. Optical rotary encoder resolution: 0.025% with "Fine Adjustment" mode selected. 0.25% with "Coarse Adjustment" mode (default). Repeatability is < 0.1% of rated.

Static Voltage Regulation: Better than $\pm 0.005\%$ for specified line variations and 0.01% for no load to full load variations.

Dynamic Voltage Regulation: For load transients from 10% to 99% and 99% to 10%, typical deviation is less than 2% of rated output voltage with recovery to within 1% in 500 ms and recovery to within 0.1% in 1 ms.

Ripple: Better than 0.025% of rated voltage at full load (0.1% RMS for > 100kV).

Current Regulation: When in current regulation mode, better than 0.1% from short circuit to rated voltage at any load condition.

Voltage Monitor: 0 to +10 V equivalent to 0 to rated voltage. Accuracy: 0.5% of reading + 0.2% of rated. Impedance is 10 K Ω .

Current Monitor: 0 to +10 V equivalent to 0 to rated current. Accuracy: 1% of reading + 0.1% of rated. Impedance is 10 K Ω .

Stability: 0.01% per hour after 1/2 hour warm-up, 0.05% per 8 hours.

Rise/Decay Time Constant: The voltage rise time constant is 200 ms for models up to 100 kV and 400 ms for models > 100kV, using either HV enable or remote programming control. The voltage decay time constant for all models is 200 ms with a 10% resistive load.

Temperature Coefficient: 0.01% /°C.

Ambient Temperature: -20 to +40° C, operating; -40 to +85° C, storage.

Polarity: Available with either positive, negative or reversible polarity with respect to chassis ground.

Protection: Automatic current regulation protects against all overloads, including arcs and short circuits. Thermal switches and RPM sensing fans protect against thermal overload. Fuses, surge-limiting resistors, and low energy components provide ultimate protection.

Arc Quench: An arc quench feature provides sensing of each load arc and quickly inhibits the HV output for approximately 20 ms after each arc

Arc Count: Internal circuitry senses the number of arcs caused by external load discharges. If the rate of consecutive arcs exceeds approximately one arc per second for five arcs, the supply will turn off for approximately 5 seconds to allow clearance of the fault. After this period the supply will automatically return to the programmed kV value with the rise time constant indicated. If the load fault still exists, the above cycle will repeat.

External Interlock: Open = off, closed = on. Normally latching except for blank front panel version where it is non-latching.

Remote HV Enable/Disable: 0 - 1.5 V = OFF, 2.5 - 15 V = ON.

RS232/USB/Ethernet Programming and Monitor Accuracy:

Resolution: 0.025% of full scale for both the voltage and the current programs. 0.1% of full scale for both the voltage and the current monitors

Remote setting accuracy: Voltage setting accuracy is better than 0.5% of setting + 0.2% of rated.

Remote reading accuracy: Voltage reading accuracy is 0.5% of reading + 0.2% of rated. Current reading accuracy is 1% of reading + 0.1% of rated.

Front Panel Elements.

Output Voltage & Current Display: 3.5 Digit digital meters. 1250 count maximum.

Indicators: AC Power, Current Mode, Voltage Mode, Pol +, Pol -, Fault, Fine Adjustment, Preset, Control Lock, Remote Enable, Remote Program, HV On.

AC Power: Rocker switch

Switches (momentary): HV On, SS Slope, Standby, Remote Enable, Remote Program, Preset, Fine Adjust, Control Lock.

Rotary Encoders: Voltage Adjust, Current Adjust..

Rear Panel Elements. AC power entry connector, fuses, power on indicator, ground stud, HV output connector, remote interface connector, RS232/USB connectors, and current trip switch.

The signals provided on the remote interface connector are as follows:

Inputs: Safety interlock, output voltage and current program signals, high voltage enable and remote HV on.

Outputs: Output voltage and current monitor signals, HV status, fault status, I/V mode status and a +10 V reference source.

Signal common and ground reference terminals are also provided.

Accessories: Detachable, 10 foot, shielded high voltage coaxial cable (see models chart for cable type), 8 foot NEMA 6-20P line cord, 10 foot null modem cable and 10 foot USB cable are provided.

Weight: Approximately 42 lbs.


Options

Symbol	Description
200	200 VAC \pm 10%, 48 - 63 Hz. Derate current by 10% for models up to 100 kV, maximum 1800 W..
NC	Blank front panel, power switch and indicator only.
ZR	Zero start interlock. Voltage control, local or remote, must be at zero before the HV will enable.
5VC	0-5 V voltage and current program/monitor.
ETH	Virtual RS-232 COM port over Ethernet network. (Requires compatible OS (eg Windows) for COM drivers)

Models

Positive Polarity	Negative Polarity	Reversible Polarity	Output Voltage	Output Current	Max Stored Energy (J)	Output Cable
KT70P29	KT70N29	KT70R29	0-70kV	0-29mA	14	DS 2124
KT80P25	KT80N25	KT80R25	0-80kV	0-25mA	16	DS 2124
KT100P20	KT100N20	KT100R20	0-100kV	0-20mA	20	DS 2124
KT125P12	KT125N12	KT125R12	0-125kV	0-12mA	11	DS 2121
KT150P10	KT150N10	KT150R10	0-150kV	0-10mA	16	DS 2121

Outline

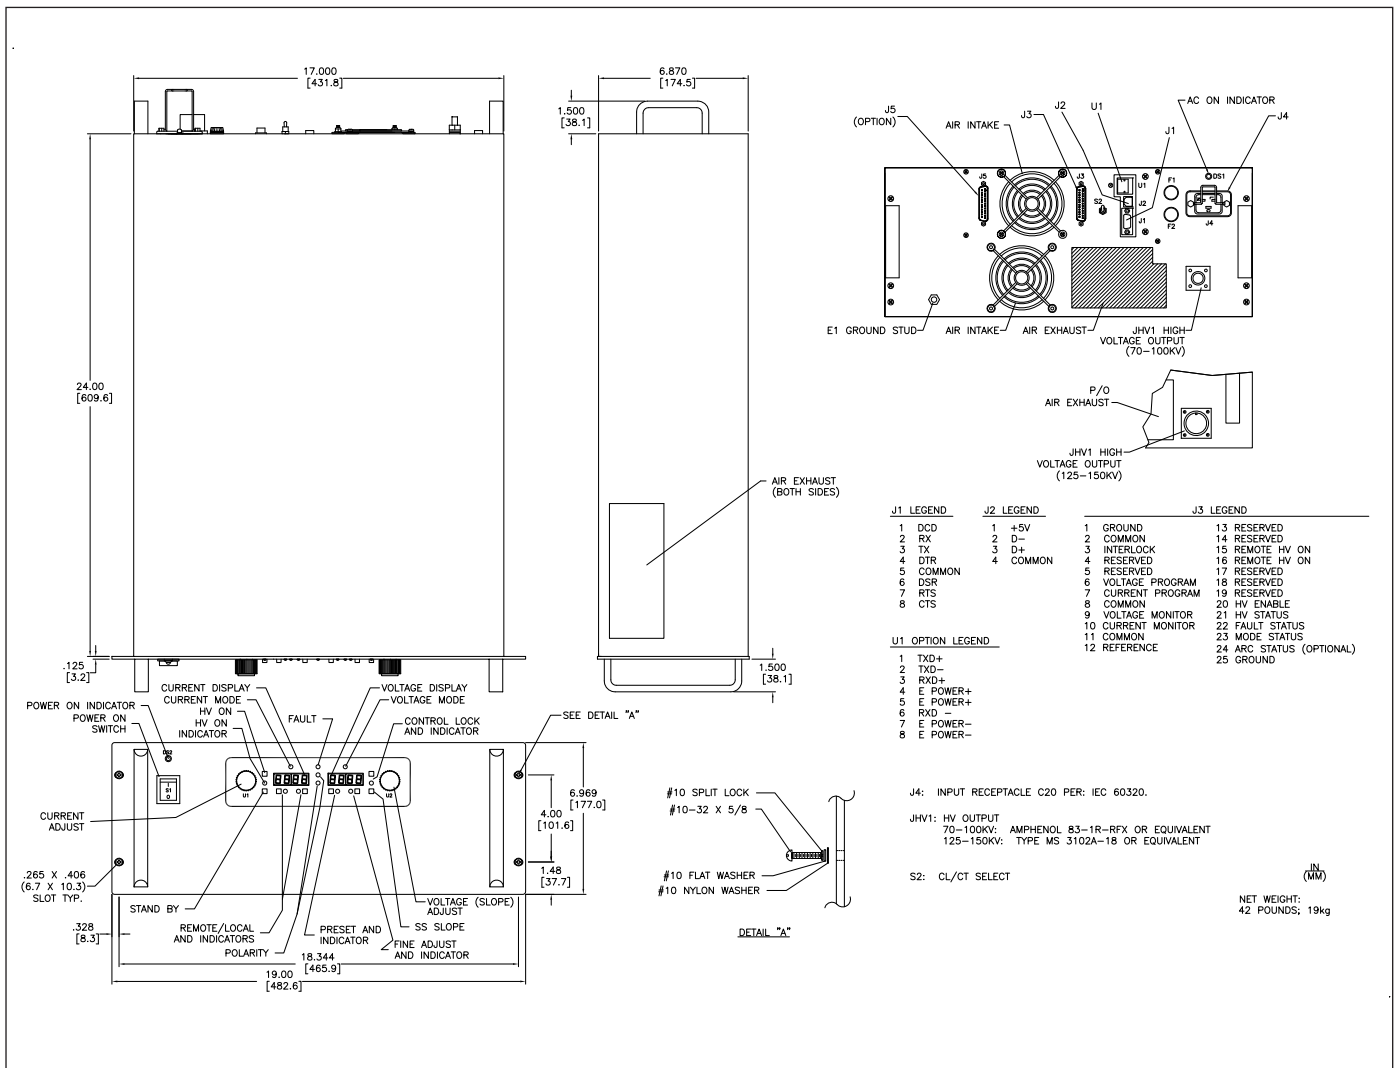



Designing Solutions for High Voltage Power Supply Applications

GLASSMAN HIGH VOLTAGE INC.

124 West Main Street, PO Box 317, High Bridge, NJ 08829-0317
(908) 638-3800 • Fax (908) 638-3700 • www.glassmanhv.com