


LXRC-165HT-SC | Battery Cell

ENGINEERED POWER, BATTERY DATA SHEET

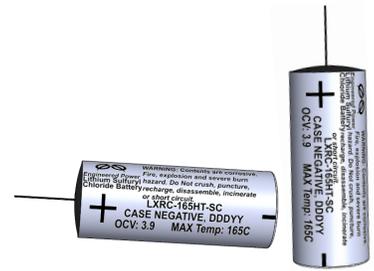


DOT Tested · Hermetically Sealed · High Quality · Reliable & Safe

Serviceability is part of our promise. Engineered Power's global network of engineers provides localized expert design, experienced service knowledge, and timely product delivery where you want it and when you need it.

Battery Features

- primary
- lithium sulfuryl chloride
- gallium electrolyte
- high energy
- high temperature
- high rate
- custom terminations

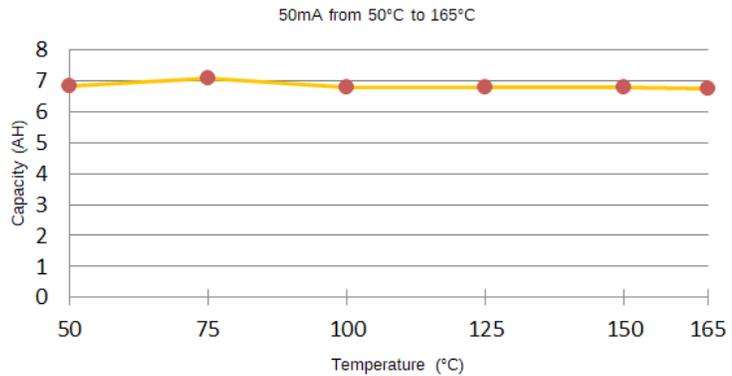

Technical Data

Capacity:
6.8 AH @ 50mA, 125°C

Voltage:
3.93 V OCV
3.81 V CCV - 50 mA, 125°C

Constant Current Capability:
50 mA Nominal
250 mA Max

Operating Temperature:
-4°F to +329°F
-20°C to +165°C

Physical Data

Diameter:
1.000 inch ± 0.010 (25.4 mm)

Height:
2.050 inch ± 0.050 (52.1 mm)

Weight:
2.3 ounces (66 grams ± 3)

Shock & Vibration Data

UN/DOT Certified

Suitable Applications

Oil well instrumentation,
downhole and pressure
gauge.

Minimize Risk. Maximize Your Power.

Tel 403 235 2584
info@engineeredpower.com



POWERED BY
LITHION

Updated: May 2021