

LXRC-HT-SC | Battery Cell

ENGINEERED POWER, BATTERY DATA SHEET




DOT Tested · Hermetically Sealed · High Quality · Reliable & Safe

Serviceability is part of our promise. Engineered Power's global network of engineers provides localized expert design, experienced service knowledge, and timely product delivery where you want it and when you need it.

Battery Features

- primary
- lithium sulfuryl chloride
- gallium electrolyte
- high energy
- high temperature
- high rate
- custom terminations

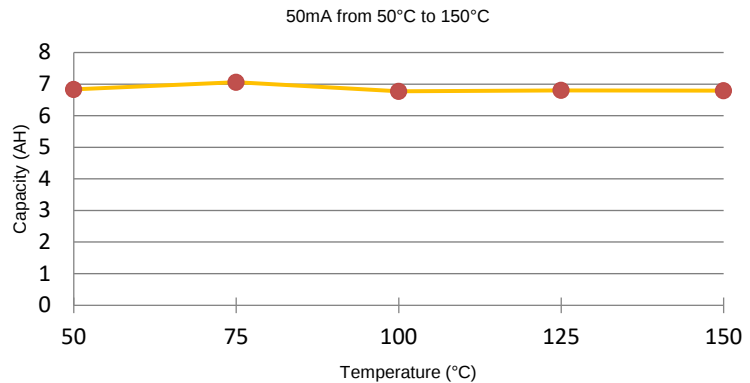

Technical Data

Capacity:
6.8 AH @ 50mA, 125°C

Voltage:
3.93 V OCV
3.81 V CCV – 50 mA, 125°C

Constant Current Capability:
50 mA Nominal
250 mA Max

Operating Temperature:
-4°F to +302°F
-20°C to +150°C

Physical Data

Diameter:
1.000 inch ± 0.010 (25.4 mm)

Height:
2.050 inch ± 0.050 (52.1 mm)

Weight:
2.3 ounces (66 grams ± 3)

Suitable Applications

Oil well instrumentation,
downhole and pressure
gauge.

Shock & Vibration Data

UN/DOT Certified

Shock Test:
1,000G 0.5 ms shocks in
X, Y,Z axis for 10 shocks

Vibration Test:
20 GRMS vibration

Minimize Your Risk and Maximize Your Power!

#20, 3103 - 14 Avenue N.E.
Calgary, Alberta, Canada
T2A 7N6



ENGINEERED POWER

www.engineeredpower.com | email info@engineeredpower.com