




ENGINEERED POWER LP

LIR18MM-165HT

**High Temperature Discharge
150mA, 165C**

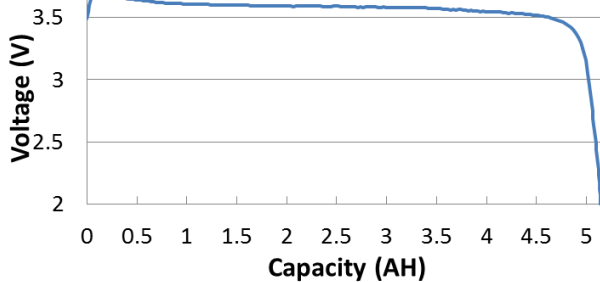

**Primary
High Energy
High Temperature
High Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA

Capacity: 5 Ah

Rated Current: 150 mA

Voltage: 3.65 V (Open Circuit)

Max Current: 300 mA

Fuse Rating: 1.0 Amp Fast

Operating Temperature: -40°F to 329°F (-40°C to +165°C)

Physical Dimensions: 4.0 inch (102 mm) x 0.69 inch (17.5 mm) diameter

Weight: 53g +/- 2g

Shock Tolerance: 1000G for 0.5 ms, 10 shocks each axis at 165°C

Vibration Tolerance: 40G RMS vibration at 165°C

Suitable Applications: Measurement While Drilling (MWD), Logging While Drilling (LWD)

Oil Well Instrumentation

ENGINEERED POWER LP

WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584
Fax: (403)235-2590
Web: <http://www.engineeredpower.com>

Updated: October 2014