

SPIRAL-1/2AA


LIR1/2AA-180HT



ENGINEERED POWER LP

LIR1/2AA-180HT

Capacity vs Temperature
25mA Discharge

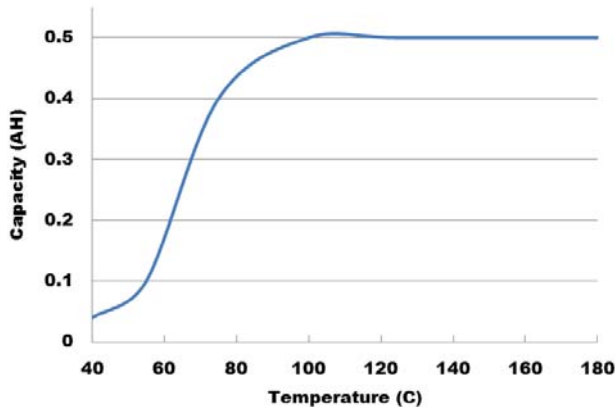

**Primary
High Energy
Extreme High Temperature
High Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 0.5 Ah

Rated Current: 25 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: 104°F to +356°F (40°C to +180°C)

Physical Dimensions: 1.00 inch (25.4 mm) x 0.53 inches (13.4 mm) diameter

Weight: 10 grams +/- 1 gram

Suitable Applications: Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: April 2013