




ENGINEERED POWER LP

LIR3/4D-165HT

High Temperature Discharge
500mA, 165C

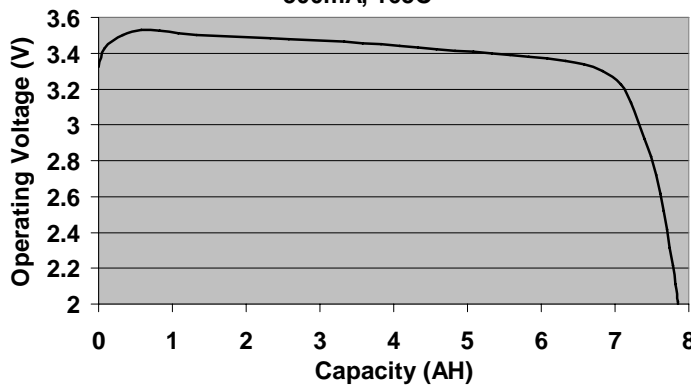

**Primary
High Energy
High Temperature
High Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 7.5 Ah

Rated Current: 500 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +329°F (-40°C to +165°C)

Physical Dimensions: 1.95 inch (49.5 mm) x 1.25 inches (31.8 mm) diameter

Weight: 2.9 ounces (82 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Oil Well Instrumentation,
Logging While Drilling (LWD)

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584
Fax: (403)235-2590
Web: <http://www.engineeredpower.com>

Updated: November 2010