




**ENGINEERED POWER LP**

## LIRAA-180HT

Capacity vs Temperature  
50mA Discharge

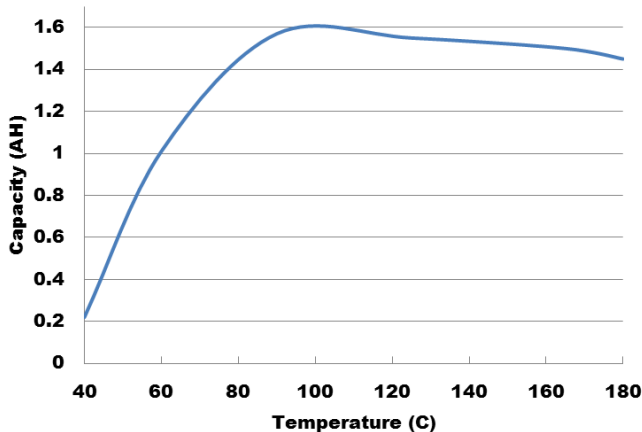

**Primary  
High Energy  
Extreme High Temperature  
High Rate  
Lithium Thionyl Chloride  
Custom Terminations**

### TECHNICAL DATA:

**Capacity:** 1.4 Ah

**Rated Current:** 50 mA

**Voltage:** 3.67 V (Open Circuit)

**Operating Temperature:** 104°F to +356°F (40°C to +180°C)

**Physical Dimensions:** 2.00 inch (50.8 mm) x 0.527 inches (13.4 mm) diameter

**Weight:** 17.0 +/- 1 gram

**Suitable Applications:** Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

**ENGINEERED POWER LP**  
**WHEN PERFORMANCE COUNTS**

#20, 3103 – 14<sup>th</sup> Ave N.E.  
Calgary, Alberta, T2A 7N6  
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

*Updated: June 2012*