




ENGINEERED POWER LP

LIRAA-HT

High Temperature Discharge

50mA, 150C

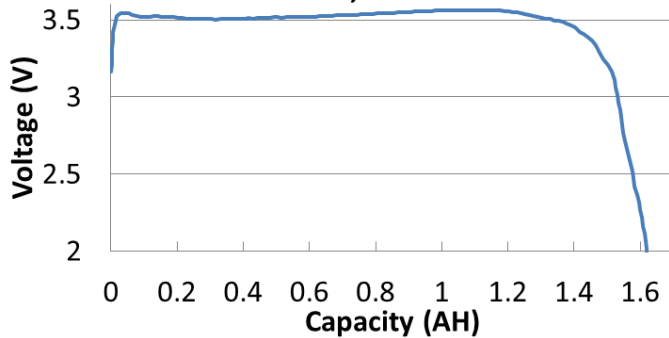

**Primary
High Energy
High Temperature
High Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 1.6 Ah

Rated Current: 50 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +302°F (-40°C to +150°C)

Physical Dimensions: 2.00 inch (50.8 mm) x 0.527 inches (13.4 mm) diameter

Weight:

Suitable Applications: Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

ENGINEERED POWER LP

WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: October 2011