


**SPIRAL-D**

**LIRD-165HT**



**ENGINEERED POWER LP**

# LIRD-165HT

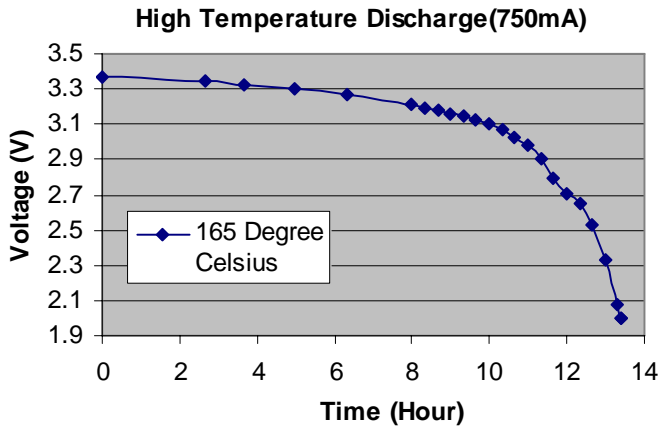

**Primary  
High Energy  
High Temperature  
High Rate  
Lithium Thionyl Chloride  
Custom Terminations**

## TECHNICAL DATA:

**Capacity:** 10.0 Ah

**Rated Current:** 750 mA

**Voltage:** 3.67 V (Open Circuit)

**Operating Temperature:** -40°F to +329°F (-40°C to +165°C)

**Physical Dimensions:** 2.35 inch (59.7 mm) x 1.25 inches (31.8 mm) diameter

**Weight:** 3.5 ounces (100 grams ±5 grams)

**Suitable Applications:** Measurement While Drilling (MWD), Oil Well Instrumentation,  
Logging While Drilling (LWD)

---

**ENGINEERED POWER LP**  
**WHEN PERFORMANCE COUNTS**

#20, 3103 – 14<sup>th</sup> Ave N.E.  
Calgary, Alberta, T2A 7N6  
Canada

Phone: (403)235-2584  
Fax: (403)235-2590  
Web: <http://www.engineeredpower.com>

*Updated: January 2008*