




ENGINEERED POWER LP

LMR21MM-200HT

Capacity vs Temperature
150mA Discharge

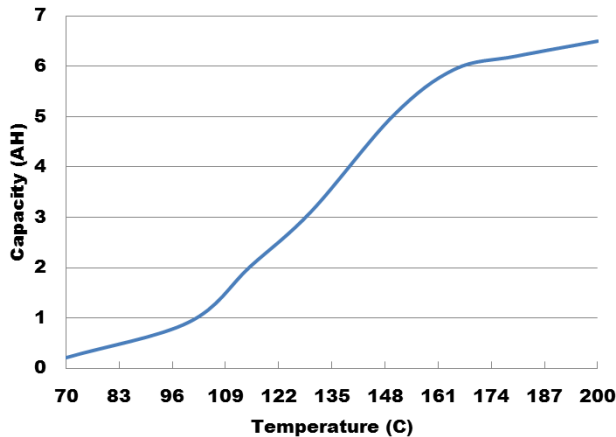

**Primary
High Energy
Extreme High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 6.5 Ah

Rated Current: 150 mA

Voltage: 3.67 V (Open Circuit)

Max Current: 300 mA

Operating Temperature: 158°F to +392°F (70°C to 200°C)

Physical Dimensions: 3.95 inch (100.3 mm) x 0.815 inches (20.7 mm) diameter

Weight: 2.47 ounces (72 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: June, 2012