




**ENGINEERED POWER LP**

## LMRC-HT

High Temperature Discharge(100mA)

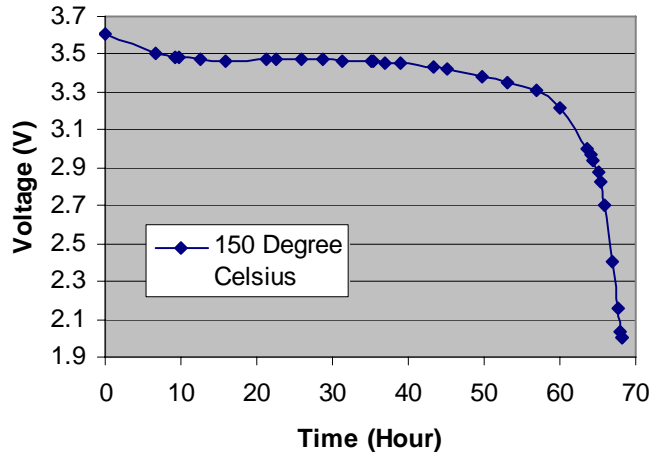

**Primary  
High Energy  
High Temperature  
Moderate Rate  
Lithium Thionyl Chloride  
Custom Terminations**

### TECHNICAL DATA:

**Capacity:** 6.5 Ah

**Rated Current:** 100 mA

**Voltage:** 3.67 V (Open Circuit)

**Max Current:** 200 mA

**Operating Temperature:** -40°F to +302°F (-40°C to +150°C)

**Physical Dimensions:** 1.95 inch (49.5mm) x 0.98 inches (25.0mm) diameter

**Weight:** 1.9 ounces (54.0 grams ±5 grams)

**Suitable Applications:** Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

**ENGINEERED POWER LP**  
**WHEN PERFORMANCE COUNTS**

#20, 3103 – 14<sup>th</sup> Ave NE  
Calgary, Alberta, T2A 7N6  
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

*Updated: June 2013*