




ENGINEERED POWER LP

LMRCC-HT

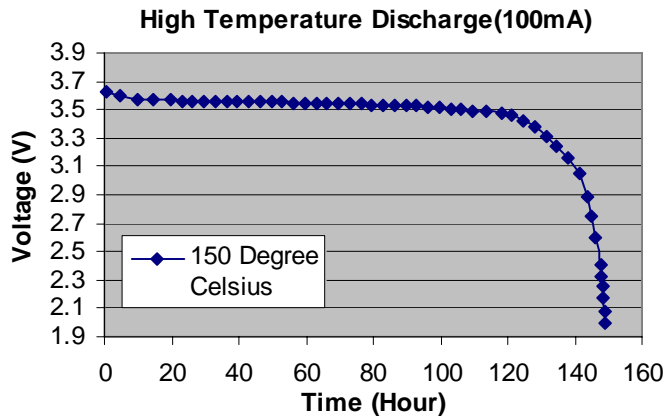

**Primary
High Energy
High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 15 Ah

Rated Current: 100 mA

Voltage: 3.67 V (Open Circuit)

Max Current: 250mA

Operating Temperature: -40°F to +302°F (-40°C to +150°C)

Physical Dimensions: 3.85 inch (97.9mm) x 0.98 inches (25.0mm) diameter

Weight: 3.5 ounces (100.0 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: June 2013