


**ENGINEERED POWER LP**

## LMRD-DA-HT

High Temperature Discharge  
325mA, 150C

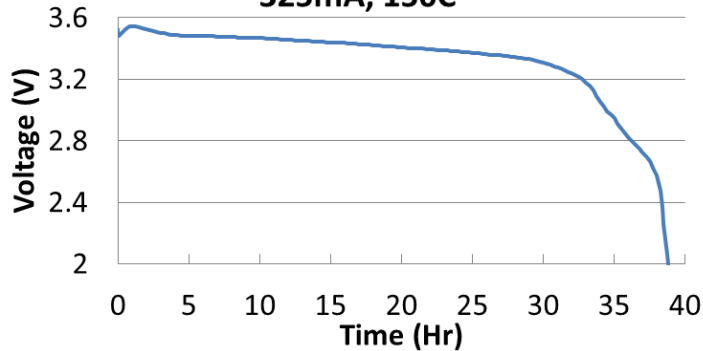

**Primary  
High Energy  
High Temperature  
Moderate Rate  
Lithium Thionyl Chloride  
Custom Terminations**

### TECHNICAL DATA:

**Capacity:** 13 Ah

**Rated Current:** 325 mA

**Voltage:** 3.67 V (Open Circuit)

**Max Current:** 650 mA

**Operating Temperature:** -40°F to +302°F (-40°C to +150°C)

**Physical Dimensions:** 2.28 inch (58.0mm) x 1.25 inches (31.8mm) diameter

**Weight:** 3.5 ounces (100 grams ±5 grams)

**Suitable Applications:** Measurement While Drilling (MWD), Logging While Drilling (LWD)  
Oil Well Instrumentation

**ENGINEERED POWER LP**  
**WHEN PERFORMANCE COUNTS**

#20, 3103 - -14<sup>th</sup> Ave N.E.  
Calgary, Alberta, T2A 7N6  
Canada

Phone: (403)235-2584  
Fax: (403)235-2590  
Web: <http://www.engineeredpower.com>

*Updated: May 2014*