

# LMRDDD-DA-180HT | Battery Cell

ENGINEERED POWER, BATTERY DATA SHEET




DOT Tested · Hermetically Sealed · High Quality · Reliable & Safe

Serviceability is part of our promise. Engineered Power's global network of engineers provides localized expert design, experienced service knowledge, and timely product delivery where you want it and when you need it.

## Battery Features

- primary
- lithium thionyl chloride
- high energy
- extreme temperature
- moderate rate
- custom terminations

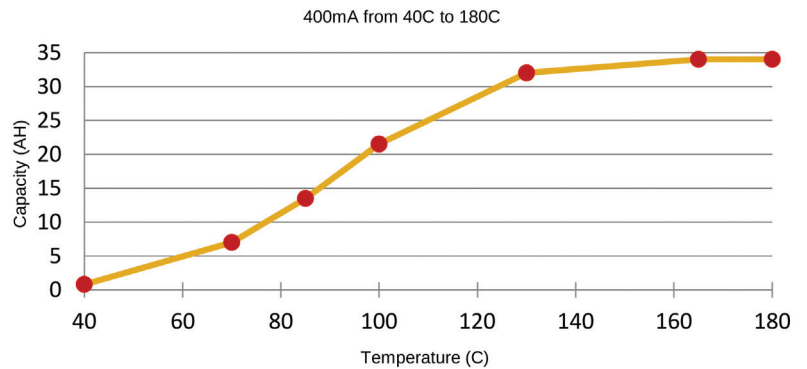

## Technical Data

Capacity:  
34 AH Nominal

Voltage:  
3.67 V OCV  
3.60 V CCV – 400 mA, 180°C

Constant Current Capability:  
400 mA Nominal  
800 mA Max

Operating Temperature:  
+104°F to +356°F  
+40°C to +180°C

## Physical Data

Diameter:  
1.25 inch ± 0.010 (31.8 mm)

Height:  
6.82 inch ± 0.050 (173.2 mm)

Weight:  
9.14 ounces (259 grams ± 5)

## Shock & Vibration Data

UN/DOT Certified

Shock Test:  
To be determined

Vibration Test:  
To be determined

## Suitable Applications

Measurement while drilling (MWD),  
logging while drilling (LWD), oil  
well instrumentation.

*Minimize Your Risk and Maximize Your Power!*



**ENGINEERED POWER**

www.engineeredpower.com | email info@engineeredpower.com

#20, 3103 - 14 Avenue N.E.  
Calgary, Alberta, Canada  
T2A 7N6

1750 Evergreen Street  
Duarte, California, USA  
91010