




ENGINEERED POWER LP

LMRE-DA-HT

High Temperature Discharge
400mA, 125C

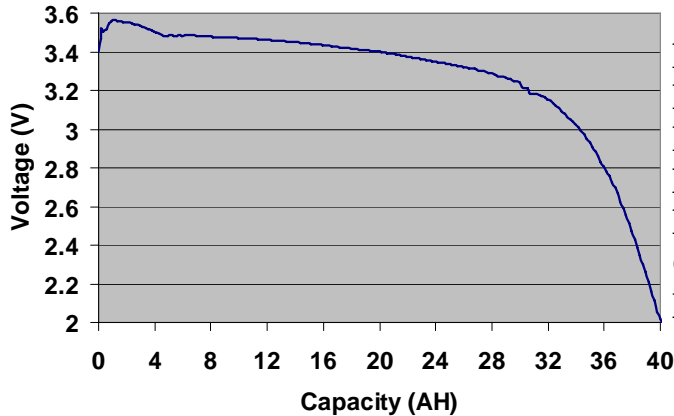

**Primary
High Energy
High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations
Non-Bulge design**

TECHNICAL DATA:

Capacity: 40.0 Ah @ 125C

Rated Current: 400 mA

39.0 Ah @ 150C

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +302°F (-40°C to +150°C)

Physical Dimensions (Including top washer)

3.325 inch (8.45 cm) x 1.855 inches (4.71cm) diameter

Weight: 12.52 ounces (355 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Logging While Drilling (LWD)

Oil Well Instrumentation

ENGINEERED POWER LP

WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: May, 2010